

Live life in the passing lane.



GPS-accelerated accuracy blocks false alarms.



Extreme radar / laser detection protection.

Powerful Digital Signal Processor | Instantly clear voice alerts | Convenient magnetic mount system

Owner's Manual

Designed in the USA

Beltronics USA, Inc.
5442 West Chester Road
West Chester OH 45069

866.468.0322
Beltronics.com

©2015 Beltronics USA, Inc. Beltronics®, GT-7™, Escort Live!™, Defender®, AFR®, TrueLock™, SmartShield®, SpecDisplay™, AutoSensitivity™ and ExpertMeter™ are trademarks of Beltronics USA, Inc..

Manufactured in Canada. Features, specifications, and prices subject to change without notice.

FCC NOTE: Modifications not expressly approved by the manufacturer could void the user's FCC granted authority to operate the equipment.
FCC ID: QK4G7M5. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Congratulations



GT-7 Features

Take the freedom of the road back with the supercharged **Beltronics GT-7**, equipped with GPS technology accuracy to eliminate false alerts.

You've just purchased the first and only radar/laser detector to offer High Definition (HD) performance and accuracy—the all-new Beltronics GT-7. Now you can take ticket protection to the max, and protect your wallet too.



GT-7 features a new multi-color OLED display.



Brilliant graphics illuminate intuitive icons that identify the type of threat at a glance.



illuminate intuitive icons that identify the type of threat at a glance.



illuminate intuitive icons that identify the type of threat at a glance.

- GT-7's HD Performance accurately identifies real threats sooner than any other detector, providing more advanced warning when you need it.
- GT-7's new multicolor OLED display features brilliant graphics and intuitive icons that help you identify threats at a glance.
- GT-7's GPS location-based intelligence automatically locks out false alerts and allows you to mark locations for future reference.
- GT-7 gives you access to DEFENDER Database, which warns you of verified speed traps, speed cameras, and red light cameras.
- Plus, it's compatible with ESCORT Live, the award-winning ticket protection network that warns you of upcoming alerts received and reported by other users in the area, and gives you access to local speed limit data for over-speed alerts (requires optional SmartCord Live and app subscription).



Compatible with
ESCORT
(Live!)

Table of Contents


Getting Started	4	• Voice Alerts	9
Controls & Features	5-9	• Signal-Strength Meter	9
• GT-7 Detector	5	Standard	9
• SmartCord	5	Tech	9
• AutoPower	6	Threat	9
• Volume	6	Programming	10-11
• Mute	6	• How to use Programming	10
AutoMute	6	• Overview of Programming	10-11
SmartMute	6	• Notes for Programming	10
• User Mode	6	• Clearing the Database	10
Advanced	6	• Restoring Factory Settings	10
Novice	6	• ESCORT Live!	10
• Display Color	6	Understanding Your Detector	12-14
• Display Brightness	6	• Interpreting Alerts	12
• Speed Display	6	• How Radar Works	13
• Radar Sensitivity	7	• How Pop Works	13
Highway	7	• How Laser Works	13
Auto	7	• How TSR Works	13
Auto No X	7	• How Red Light Cameras Work	14
• TrueLock/Locking Out False Alerts	7	• How Speed Cameras Work	14
• AutoLock	7	• How GPS Works	14
• Marking Locations	7-8	Troubleshooting	15
• Over-Speed Alert	8	Software Updates	16
• Alert Tones	8	Service	16
Standard	8	Parts & Accessories	17
Mild	8	Warranty	17

What's Included

- Radar/laser detector unit
- StickyCup windshield mount
- SmartCord power adapter
- Quick Reference Guide
- Travel case

Mounting Tips

- Center on windshield between driver and passenger.
- Ensure clear view of road ahead and sky above.
- Avoid windshield wipers and heavily tinted areas.

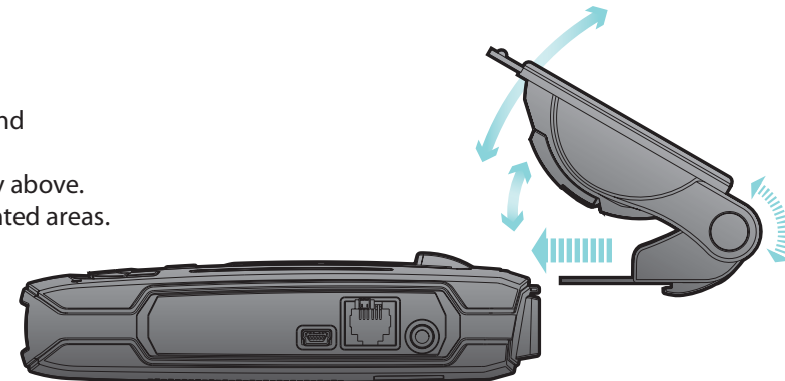

To Mount In Your Vehicle:


- 1 Remove backing from StickyCup mount.
- 2 Firmly press StickyCup onto windshield and flip locking clamp to secure.
- 3 Slide the detector onto the mounting bracket until it's fully engaged. The magnet inside holds the detector in place
- 4 To adjust view, loosen thumb wheel and adjust angle of mounting bracket. Tighten thumb wheel to secure.
- 5 To remove detector, gently pull the detector off the mounting bracket.
- 6 To remove mount from windshield, release locking clamp and pull tab on top of StickyCup



StickyCup Care Instructions

To clean your StickyCup, simply rinse under warm water, gently wipe off any debris and allow to air dry.

Using GT-7:

- 1 Plug small end of SmartCord into modular jack on GT-7 and large end of SmartCord into your car's lighter/accessory socket.
- 2 GT-7 should power on automatically. If not, press the device's power button. 

NOTE: You can easily access and customize all of your Settings and Preferences by pressing and holding the MRK and SEN buttons. See Programming for details



- Earphone Jack**
Connects to optional 3.5 mm stereo earphone.
- Modular Jack**
Connects to SmartCord for powering your device
- Mini USB Jack**
Connects to your computer via USB A/mini B cable for downloading software updates



SmartCord

The SmartCord is a special power cord that has a power-on indicator, a bright alert light that warns of radar or laser, and a convenient MUTE button right on the plug. It's perfect for any car where reaching the detector's MUTE button on the windshield is a stretch. For discreet night driving, put GT-7 Max in Dark mode and use the SmartCord for your visual alerts. Other drivers won't know you have a detector.

For descriptions of features and functions available when connected to SmartCord Live with ESCORT Live, visit escortinc.com and download the SmartCord Live user manual for your iOS or Android OS smartphone.

Using SmartCord

- Mute Button: Press to mute an alert; press three times to lock out a false alert; press twice while receiving a locked-out alert to unlock.
- Alert Light: Blinks orange when receiving an alert.
- Power Light: Lights blue when receiving power.



- Modular Connector**
Plugs into detector jack
- Lighter Adapter**
Connects to lighter/accessory socket

AutoPower

This feature automatically turns off GT-7 after a set period of time to save unnecessary drain on your battery. This is especially useful if your vehicle has a constant-power ignition. See the Settings & Preferences section for details on how to customize the AutoPower feature.

NOTE: When AutoPower is ON, the display will go dark after the vehicle has been sitting still for 30 minutes, to save screen life. The screen will turn back on automatically once your vehicle reaches a speed of 10 mph.

Volume

To adjust GT-7 to your preferred audio level for alerts, simply press and hold VOLUME + or -. The audio will increase/decrease while it is depressed. Once you reach the desired audio level, simply release the button. GT-7 will retain this setting in its memory, even if the system is turned off.

Mute

The MUTE button allows you to silence the audio during an alert. Simply press the button during the alert. Once the radar encounter has passed, the mute will disengage, and the audio will return to your pre-set level. You can also silence an alert by pressing the SmartCord MUTE button.

AutoMute

Your GT-7 also includes the patented AutoMute feature. Once GT-7 alerts you to a radar encounter at your selected volume level, it automatically reduces the volume more than 50%. This keeps you informed without the annoyance of a continuous full-volume alert. If you prefer, you can turn the AutoMute feature off. See the Programming section for details.

SmartMute

If AutoMute has already reduced the volume for one alert and a higher-priority band is detected, GT-7 will sound an alert at your set volume for the second band before adjusting the volume back down to the AutoMute level.

User Mode

GT-7 offers two unique user modes:

Advanced


In this mode, you can access and customize all of GT-7's settings and preferences.

Novice

In this mode, you can access and customize units (English or metric) and display color only. All other preferences are set to the factory defaults. To view all settings and preferences, you must switch back to Advanced mode.

Display Color

Your detector screen can be displayed with copper, blue, green or red accents to match the dashboard lighting of various vehicles. See the Programming section for details on how to change the display color.

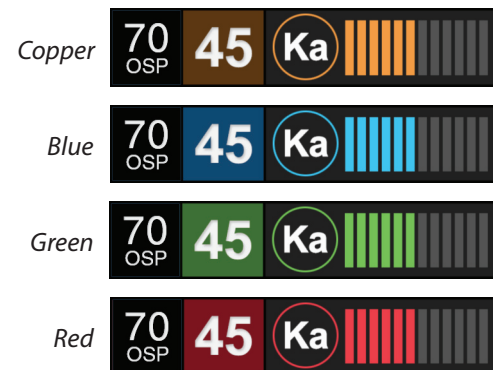

Display Brightness


GT-7's display brightness is automatically adjusted to suit ambient lighting conditions in your car. (The light sensor is located inside the controller, so the display may dim momentarily when you access the buttons.) If you prefer, you can press the BRT button to set a fixed brightness level:

- Auto** Automatically adjusts brightness (factory setting)
- Dark** Dark mode
- Minimum** Minimum brightness
- Medium** Medium brightness
- Maximum** Maximum brightness

NOTE: If you select Dark mode, the display will not provide any indication that it is on. Therefore, only audible alerts will notify you of detected signals.

Speed Display

GT-7 displays your current speed just to the right of the Over-Speed Alert setting (or posted speed limit for your current location, if connected to ESCORT Live). If you prefer, you can turn off the speed display feature (see Programming section for details). If speed display is OFF, GT-7 will simply display your battery voltage in this location.

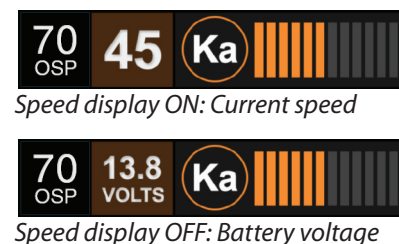

Radar Sensitivity

The SEN button allows you to select your preferred radar sensitivity: Highway, Auto or Auto No X. In general, Beltronics recommends Auto for everyday driving.

Highway

In this setting, GT-7 will detect all radar signals on all bands at maximum range.

Auto

In this setting, GT-7 will continuously analyze all incoming signals and intelligently adjust the sensitivity circuits, providing long-range warning with minimal false alarms.

Auto No X

Auto No X works the same as Auto mode; however, X band is completely turned off.

WARNING: Do not use GT-7 in Auto No X unless you are absolutely certain that there are no traffic radar guns using X band in your area.

TrueLock/Locking Out False Alerts

GT-7 is equipped with a TrueLock GPS Filter to lock out and store in its memory false alerts. To lock out a false alert (X band, K band or laser only), press the MUTE button on the detector or the SmartCord three times during an alert. Pressing the first time will silence the audio. Pressing a second time will generate a prompt on the display that will read "Lockout?" Press a third time to confirm you want to lock this signal out by location and frequency. A "Stored" message will be displayed.

Once a signal has been stored, GT-7 will reject the signal the next time you approach this area and will display the locked-out alert.



To unlock a signal that has already been stored, simply press and hold the detector or SmartCord MUTE button while receiving the locked out alert. The display will read "Unlock?" Press the detector or SmartCord MUTE button again to unlock it from memory. The display will then read "Unlocked" to confirm your action.

For details on how to turn the GPS Filter off, refer to the Programming section.

NOTE: When the GPS Filter is set to OFF, you do not have access to GT-7's other GPS-enabled features (e.g., DEFENDER Database alerts, marking locations, etc.).


AutoLock

The AutoLock feature analyzes (over time) the source of radar signals by location and frequency. This allows GT-7 to determine if a signal is a real threat or a false one. If it determines that the signal is an automatic door opener, motion sensor, etc., it automatically locks out this source at this particular location. A "Stored" message will appear on the display when a signal has been automatically locked out. If you prefer, you can turn the AutoLock feature off. See the Programming section for details.

NOTE: AutoLock typically needs to encounter the exact frequency in the same location approximately three times to lock it out. Since some door openers are turned on and off routinely, some variations may occur. When AutoLock is on, GT-7 will also unlearn signals to protect you from locking out real threats. If a particular signal is no longer present at a location that was previously locked out, GT-7 will unlock that signal.

Marking Locations

The MRK button allows you to mark a specific location and label it for future reference. Once marked, GT-7 will provide an alert when you reach this area again.

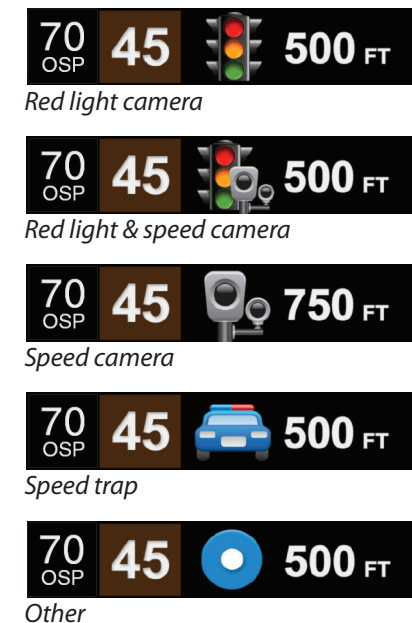

GT-7 gives an advanced warning of upcoming markers at the following distances:

- Red light cameras: 250 ft or 10 seconds
- Red light & speed cameras: 250 ft or 10 seconds
- Speed cameras: 500 ft when traveling below 55 mph; 1,000 ft when traveling above 55 mph
- Speed traps: 0.3 mi or approximately 1,584 ft
- Other: 500 ft when traveling below 55 mph; 1,000 ft when traveling above 55 mph

To mark a location, press the MRK button. The display will read "Mark?" Press MRK again to bring up a menu of markers to choose from. Press VOLUME + or - to scroll through the markers, then press MRK to select the marker you wish to use at this location. The display will read "Marked!"

NOTE: When a location is marked the first time, you must travel at least 1 mile away from that location to receive an alert when you return to the area.

To unmark a location, touch the MRK button when you are receiving a marked-location alert. The display will read "Unmark?" Touch the MRK button again to confirm. The display will read "Unmarked!" To customize the types of markers you want to be able to set and receive, see the Settings & Preferences section.

Over-Speed Alert

With GT-7, you can set the Over-Speed Alert to notify you when you are traveling over a specified speed (factory default is 70 mph; see Programming for details). When you travel above the speed threshold you have set, the background display for your current speed will turn red to alert you that you have exceeded the specified speed.



Standard

Alert Tones

Standard

GT-7's factory default for alert tones is the Beltronics Standard mode, in which GT-7 uses a Geiger counter-type sound to indicate the signal strength and type of radar signal being encountered. When you encounter radar, a distinct audible alert will sound and will increase as the signal gets stronger. This allows you to judge the distance from the signal source without taking your eyes off of the road. Each band has a distinct tone for easy identification:

- X band** = beep tone
- K band** = brap tone
- Ka band** = double-brap tone
- Laser** = solid brap tone
- Pop** = solid brap tone

Mild

If you prefer, you can change your alert tone settings to Mild mode, which offers softer, simpler alert tones that are less obtrusive to the driving experience:

X band, K band, Ka band and Pop = Doorbell chime

Low signal strength = Double chime

High signal strength = Triple chime

If alert remains in area

more than 15 seconds = Single chime (as a reminder)

Laser = Solid brap tone (Since laser signals are a possible threat no matter how weak, GT-7 alerts you to all laser signals with a full laser alert.)

See the Programming section for details on switching your alert tones.

Cruise Alert

The Cruise Alert feature allows you to modify your alert tones when traveling below a specified speed (factory default is 20 mph; see Programming for details). For all alerts received while traveling below the specified speed, GT-7 will sound a simple double-beep alert.

Voice Alerts

GT-7 provides digital voice announcements for alerts and selection feedback. If you prefer, you can turn off the voice feature. See the Programming section for details.

Signal-Strength Meter

GT-7 offers four different settings for displaying alerts:



Standard

The **Standard** option provides information on a single radar signal. When GT-7 detects radar, it displays the band of the radar (X, K or Ka) and a bar graph of the signal's strength. When laser is detected, the display will simply read "Laser." If there are multiple signals present, GT-7 will determine which one is the most important threat to display.



Tech

The **Tech** option is an advanced display for experienced detector users. In this mode, it will display the actual numeric radar frequency being received. Even long-time detector users will require some time to get familiar with this new level of information about detected signals. To use GT-7 in Tech meter mode, you must select it in Programming.



Threat

The **Threat** option is also designed for the advanced detector user. In this mode, GT-7 simultaneously tracks up to four radar signals (Ka band, X band, K band and X band) and shows each signal along with a bar graph of its strength. Threat meter mode can help you spot a change in your normal driving environment (e.g., a traffic radar unit being operated in an area where there are normally other signals present). To use GT-7 in Threat meter mode, you must select it in Programming.

ExpertMeter simultaneously tracks up to four radar signals: Ka band, X band, K band and X band. It shows each signal along with a bar graph of its strength. ExpertMeter can help you spot a change in your normal driving environment (e.g., a traffic radar unit being operated in an area where there are normally other signals present).



Basic

In this mode, **Basic** messages replace actual bands and signal strengths or frequencies. "Caution" is used when an alert is received while you are traveling below your current Cruise Alert setting (or posted speed limit for current location, when connected to ESCORT Live). "Slow Down" is displayed when an alert is received while you are traveling above the current Cruise Alert setting (or posted speed limit for current location, when connected to ESCORT Live).

NOTE: GT-7's selectable bands feature allows you to customize which bands are monitored. For details on modifying your band detection, see the Programming section. For details on the various radar/laser bands and how they work, see the Understanding Your Detector section.

How To Use Programming

To access Programming, press and hold both the MRK and SEN buttons. GT-7 will display "Program," indicating it is in program mode.

Once the unit is in Programming mode, the MRK button is used to review the preference categories, and the VOLUME + AND - buttons are used to change the individual settings within the selected option.

To exit Programming, simply wait a few seconds without pressing a button. The unit will display "Completed" and return to normal operation.

Example:

Here's how you would turn the AutoMute feature off:

- 1 Enter Programming by pressing and holding both the MRK and SEN buttons. GT-7 will display "Program."
- 2 Press the MRK button to scroll through the categories to "AutoMute."
- 3 Since the factory setting is for AutoMute to be on, GT-7 will show AutoMute as ON.
- 4 Press the VOLUME + or - button to change from ON to OFF.
- 5 To complete this change, simply wait a few seconds without pressing a button. The unit will display "Complete" to confirm your selection.

NOTE: You can only access and customize the AutoMute feature while in the Advanced user mode. See Overview of Programming below for details on how to switch user modes.

Overview Of Programming

Press and hold the MRK and SEN buttons to access Programming. To exit Programming, simply wait a few seconds without pressing a button. The unit will display **Completed** to confirm your selections.

NOTE: AutoPower works only with constant-power ignitions.

NOTE: When AutoPower is ON, the display will go dark after the vehicle has been sitting still for 30 minutes, to save screen life. The screen will turn back on automatically once your vehicle reaches a speed of 10 mph.

To view your device's serial number and software version, press and hold the MRK and MUTE buttons while powering on the detector.

Notes For Programming

For descriptions of features and functions available when connected to SmartCord Live with ESCORT Live visit EscortInc.com and download the SmartCord Live user manual for your iOS or Android OS smartphone. Also visit Beltronics.com for the GT-7 Owner's Manual.

To view serial number and software revision press MRK and MUTE while powering on detector.

Clearing The Database

At some point, you may wish to clear some of the data in GT-7's database. This may include any of the following: DEFENDER Database data, marked locations or locked-out locations. For details on how to clear, see the Programming section.

Restoring Factory Settings

To restore GT-7 to its original factory Settings, press and hold SEN and BRT while turning the power on. A **Restored** message will display, acknowledging the reset.

ESCORT Live!

GT-7 is fully compatible with the new SmartCord Live and ESCORT Live smartphone application. For comprehensive information on these options and all of ESCORT Live's features and functions, visit escortradar.com.



Press MRK to go from one category to the next		Press VOLUME + or - to change your setting within a category
User Mode	Advanced* Novice	Access and customize all Settings and Preferences Access and customize units and display color, (all other Settings are set to factory defaults) <i>NOTE: Switch back to Advance mode to view all Preferences</i>
Pilot	Scan Bar* Full Word	Scanning Bar with Full Word Full Word: AutoScan, Auto NoX, or Highway
Display Color	Copper*/Blue/Green/Red	Set color to match your vehicle's dash display
Speed Display	On* Off	Displays current speed Displays battery voltage
Cruise Alert	Off / 20-160 mph 20 mph*	Offers double beep alert tones below specified speed
Over Speed	Off / 20-160 mph 70 mph*	Reminds you when you exceed a specified speed
Meter Mode	Standard* Tech Threat Basic	Single band with bar graph of signal strength Single band with numeric frequency Multiple bands with bar graph of signal strengths Simple messages replace bands: Caution (if traveling below cruise alert limit) Slow Down (if traveling above cruise alert limit)
Tones	Standard* Mild	Standard Beltronics alert tones Mild doorbell chime alert tones
AutoMute	On* / Off	Automatically reduces audio during alert
AutoLock	On* / Off	Automatically stores and locks out false alarms
Units	English*/Metric	Units for distance and speed
Language	English*/Espanol	Language for voice and text
Voice	On* / Off	Voice announcements
GPS Filter	On* / Off	Enables GPS-powered features
AutoPower	Off 1 Hour 2 Hours 4 Hours* 8 Hour	Power turns on or off depending on your vehicle's ignition type (constant power or switched) Powers off automatically after 1 hour Powers off automatically after 2 hours Powers off automatically after 4 hours Powers off automatically after 8 hours <i>NOTE: If AutoPower is on, the display screen goes blank after 30 minutes to save screen life. Display screen will turn on automatically after you reach 10 MPH</i>
Band Enables	Default* Modified	Default Settings for North America Customize the bands you want to monitor
Press SEN to go from one band category to the next		Press VOLUME + or - to change your setting within a category
X Band K Band Ka Band Ka-POP Laser TSR	On* / Off On* / Off On* / Off On / Off* On* / Off On* / Off	Automatically rejects traffic flow sensors-monitoring false alarms
Marker Enable	On* / Off Modified	Other, Red Light Camera, Red and Speed Camera, and Speed Trap Customize the types of locations you want to mark for future reference
Press SEN to go from one marker category to the next		Press VOLUME + or - to change your setting within a category
Other Redlight Red & Speed Speed Cam Speed Trap Air Patrol	On* / Off On* / Off On* / Off On* / Off On* / Off On / Off*	Other location Red light camera Red light & speed camera Speed camera Speed trap Known aircraft patrolled areas <i>NOTE: User cannot mark an Air Patrol location</i>
Clear Locations	Marked Lockouts Defender Format	Clear all user Marked locations. Press SEN button to confirm Clear all lockouts. Press SEN button to confirm Clear all DEFENDER data. Press SEN button to confirm Clear DEFENDER database, all markers, and all lockouts. Press SEN button to confirm

*Default Setting

Interpreting Alerts

Although GT-7 has a comprehensive warning system, only experience will teach you what to expect from your detector and how to interpret what it tells you. The specific type of radar being used, the type of transmission (continuous or instant-on) and the location of the radar source affect the alerts you receive.

The following examples will give you an introduction to understanding your detector's warning system for radar and laser alerts.

Alert	Explanation
Detector begins to sound slowly; rate of alert increases until it becomes a solid tone. The signal meter ramps accordingly.	You are approaching a continuous radar source aimed in your direction.
Detector emits short alerts for a few seconds then falls silent, only to briefly alert and fall silent again.	An instant-on radar source is being used ahead of you and out of your view.
Detector suddenly sounds a continuous tone for the appropriate band received.	An instant-on radar or laser source is being used nearby. This kind of alert requires immediate attention.
Detector sends a brief laser alert.	Laser is being used in the area. Because laser is inherently difficult to detect, any laser alert may indicate a source very close by.
Detector receives weak signals. Signals may be a little stronger as you pass large, roadside objects. Signals increase in frequency.	A moving patrol car with continuous radar is overtaking you from behind. Because these signals are reflected (reflections are increased by large objects), they may or may not eventually melt into a solid point, even when the patrol car is directly behind you.
Detector alerts slowly for a while then abruptly jumps to a strong alert.	You are approaching a radar unit concealed by a hill or an obstructed curve.
Detector alerts intermittently. Rate and strength of alerts may be consistent or vary wildly.	A patrol car is traveling in front of you with a radar source aimed forward. Because signals are sometimes reflected off of large objects and sometimes not, the alerts may seem inconsistent.
Detector alerts intermittently; rate and strength of signal increases with each alert.	A patrol car is approaching from the other direction, sampling traffic with instant-on radar. Such alerts should be taken seriously.
Detector gives an X band alert intermittently.	You are driving through an area populated with radar motion sensors (e.g., door openers or burglar alarms). Since these transmitters are usually contained inside buildings or aimed toward or away from you, they are typically not as strong or lasting as a real radar encounter.

CAUTION: Overconfidence in an unfamiliar area can be dangerous. Likewise, if an alert in a commonly traveled area is suddenly stronger or on a different band than usual, speed radar may be set up nearby.

How Radar Works

Traffic radar, which consists of microwaves, travels in straight lines and is easily reflected by objects such as cars, trucks, and even guardrails and overpasses. Radar works by directing its microwave beam down the road. As your vehicle travels into range, the microwave beam bounces off your car, and the radar antenna looks for the reflections. Using the Doppler principle, the radar equipment then calculates your speed by comparing the frequency of the reflection of your car to the original frequency of the beam sent out.

Traffic radar has limitations, the most significant of these being that it typically can monitor only one target at a time. If there is more than one vehicle within range, it is up to the radar operator to decide which target is producing the strongest reflection. Since the strength of the reflection is affected by both the size of the vehicle and its proximity to the antenna, it is difficult for the radar operator to determine if the signal is from a sports car nearby or a semi truck several hundred feet away.

Radar range also depends on the power of the radar equipment itself. The strength of the radar unit's beam diminishes with distance. The farther the radar has to travel, the less energy it has for speed detection.

Because intrusion alarms and motion sensors often operate on the same frequency as X and K band radar, your detector will occasionally receive non-police radar signals. Since these X band transmitters are usually contained inside of a building or aimed toward the ground, they will generally produce much weaker readings than will a true radar encounter. As you become familiar with the sources of these pseudo alarms in your daily driving, they will serve as confirmation that the device's radar detection abilities are fully operational.



How POP Works

POP works by transmitting an extremely short burst, within the allocated band, to identify speeding vehicles in traffic. Once the target is identified, or "popped," the gun is then turned to its normal operating mode to provide a vehicle tracking history (required by law).

NOTE: According to radar gun manufacturers, tickets should not be issued in pop mode.

How Laser Works

Laser speed detection is actually light detection and ranging (LIDAR). Laser guns project a beam of invisible infrared light. The signal is a series of very short infrared light energy pulses that move in a straight line, reflecting off your car and returning to the gun. Laser uses these light pulses to measure the distance to a vehicle. Speed is then calculated by measuring how quickly these pulses are reflected, given the known speed of light.

Laser is a newer technology whose use is not as widespread as conventional radar; therefore, you may not encounter it on a daily basis. And unlike radar detection, laser is not prone to false alarms. Because laser transmits a much narrower beam than does radar, it is much more accurate in its ability to distinguish between targets and is also more difficult to detect. As a result, even the briefest laser alert should be taken seriously.

There are limitations to laser, however. Laser is much more sensitive to weather conditions than radar, and a laser gun's range will be decreased by anything affecting visibility, such as rain, fog or smoke. A laser gun cannot operate through glass, and it must be stationary to get an accurate reading. Because laser must have a clear line of sight and is subject to cosine error (an inaccuracy that increases as the angle between the gun and the vehicle increases), police typically use laser equipment parallel to the road or from an overpass. Laser can be used day or night.

How TSR Works

GT-7 includes a new boost in anti-falsing software to eliminate excessive alerts from erroneous X and K band sources, such as traffic flow monitoring systems. These systems, which are becoming more widely used in several countries, generate K band signals to measure the flow of traffic on a given road. Unfortunately, most detectors see this as a real threat and will alert you to it unnecessarily. Our new proprietary software, TSR, intelligently sorts, ranks and rejects these types of false alarms automatically. The result is ultimate protection without excessive false alarms.



How Red Light Cameras Work

Red light cameras use three basic things: a camera, a device to trigger the camera and a computer. An intersection may have more than one camera to monitor traffic from multiple directions. The trigger is typically a series of wires buried just beneath the surface of the road. These wires are separated by a pre-set distance to create a magnetic field or induction loop. Once a vehicle is in the intersection, the loop or circuit becomes closed and alerts the computer to take a picture.

In some states, tickets are issued to the car's owner, no matter who's actually driving. In this case, the red light camera only needs to photograph the vehicle's rear license plate. In other states, the actual driver is responsible for paying the ticket. In this case, the system needs a second camera in front of the car to get a shot of the driver's face.

How Speed Cameras Work

There are several types of fixed position speed cameras used, including radar, laser, induction-loop and photo-based. Radar and laser based cameras are typically mounted near the road and transmit a short range signal across the lanes monitored. Since this signal is transmitted across the road instead of down the road like with many handheld systems, detecting them in time is critical.


Another technology used is an induction loop system. This type of system utilizes wires buried just beneath the surface of the road to trigger a computer that calculates speed between the two points. Photo based systems take two sets of pictures of all passing vehicles between two separate fixed locations. Both sets of photographs are date and time stamped, which enables the system to calculate average speed between the two locations.

Fixed speed cameras can also be set up to monitor one to four lanes of traffic in the same direction. To achieve this, a sensor is installed in each lane, and a wide angle camera lens is used to photograph the vehicle that is speeding.



How GPS Works

Developed by the U.S. military, the global positioning system (GPS) is made up of 24 orbiting satellites. There are at least four satellites visible at any given time every day. A GPS receiver is designed to locate and receive data from four of these satellites. These data include the distance to your location from each of the satellites. Once the distance from each satellite is known, the receiver can calculate and pinpoint your exact location.



Problem

Explanation/Solution

Detector beeps briefly at the same location every day, but no radar source is in sight.	An X band motion sensor or intrusion alarm is located within range of your route.
Detector did not alert when a police car was in view.	VASCAR (Visual Average Speed Computer and Recorder), a stopwatch method of speed detection, may be in use. Officer may not have radar or laser unit turned on.
Detector's audible alerts become softer after the first few alerts.	Detector is in AutoMute mode. See "AutoMute" in the Settings & Preferences section for details.
The power-on sequence reoccurs while you are driving.	A loose power connection can cause GT-7 to be briefly disconnected and will retrigger the power-on sequence. Check all connections.
You wish to restore the factory default settings.	Press and hold the SEN and BRT buttons while powering on the detector. A "Restored" message will display, acknowledging the reset.
The device will not turn on.	Check that vehicle ignition is on. Check all connections.
The display feels warm.	It is normal for the device to feel warm.
The display is blank.	GT-7 is in Dark mode. Press the BRT button to adjust the brightness.

Software Updates

GT-7's red light and speed camera database is easily updated using our exclusive detector software tools found on our web site. Firmware, or the operating software for the detector, can also be updated using these tools.

In order to have access to these updates, you must register your GT-7 at www.Beltronics.com. Once registered, you will receive email notifications that updates are now available for your database or firmware. To handle your software and DEFENDER updates you need to connect your GT-7 to a computer first. You can connect GT-7 to a computer via USB/USB Mini B cable.

To update your software, follow these simple steps:

- 1 Connect the mini USB end of the USB data cable to GT-7.
- 2 Plug the standard USB connector end of the cable into your computer.
- 3 Log on to www.escortradar.com/download.
- 4 Follow the instructions online.

Service

Service

To obtain service, contact Beltronics (800-341-2288) to obtain a Return Authorization Number. Properly pack your product and include: your name, complete return address, written description of the problem with your product, daytime telephone number and a copy of the original purchase receipt.

Label the outside of the package clearly with your Return Authorization Number.

Ship the product prepaid (insured, for your protection) to:

Beltronics USA, Inc.
Customer Service Department
Return Authorization Number _____
5442 West Chester Road
West Chester OH 45069

Parts & Accessories

The following accessories and replacement parts are available for GT-7:

- Coiled SmartCord
- DirectWire SmartCord
- SmartCord Live
- SmartCord Live DirectWire
- SHIFTER ZR4™ Laser Shifting System
- Replacement detector cases

Visit Beltronics.com for selection and pricing.

Warranty

Beltronics One-Year Limited Warranty

What this warranty covers: Beltronics USA, Inc. ("Beltronics") warrants your Product against all defects in materials and workmanship.

For how long: One (1) year from the date of original purchase from an authorized Beltronics dealer.

What we will do: If a breach of warranty occurs, Beltronics, at its discretion, will either repair or replace your Product free of charge.

What we will not do: Beltronics will not pay shipping charges that you incur for sending your Product to us.

What you must do to maintain this warranty: Show original proof of purchase or receipt from an authorized Beltronics dealer.

Warranty exclusions: This warranty does not apply to your product under any of the following conditions: 1. The serial number has been removed or modified. 2. Your product has been subjected to misuse or damage (including water damage, physical abuse, and/or improper installation). 3. Your product has been modified in any way. 4. Your receipt or proof-of-purchase is from a non-authorized dealer or internet auction site, including E-bay, U-bid, or other non-authorized resellers. 5. You are not the original purchaser of the Product from an authorized dealer or did not receive it as a gift from the original purchaser of the Product from an authorized dealer.

To obtain service: 1. Contact Beltronics (1-800-341-2288) to obtain a Return Authorization Number. 2. Properly pack your Product and include: your name, complete return address, written description of the problem with your Product, daytime telephone number, and a copy of the original proof of purchase or receipt. 3. Label the outside of the package clearly with your Return Authorization Number. Ship the Product pre-paid (insured, for your protection) to: Beltronics USA, Inc., 5442 West Chester Rd., West Chester, OH 45069.

LIMITATION OF WARRANTY: The obligations set forth above are Beltronics' sole obligations and your exclusive remedy. Beltronics makes no other express warranty. Any implied warranty of merchantability or fitness for a particular purpose that may be applicable to the Product is limited in duration to the duration of this warranty. Some States do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. BELTRONICS SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL OR INCIDENTAL DAMAGES INCLUDING, WITHOUT LIMITATION, DAMAGES ARISING OUT OF THE USE, MISUSE OR MOUNTING OF THE PRODUCT. Some States do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Beltronics is not responsible for products lost in shipment between the owner and our service center.

Other legal rights: This warranty gives you specific legal rights, and you may also have other rights which vary from State to State.